
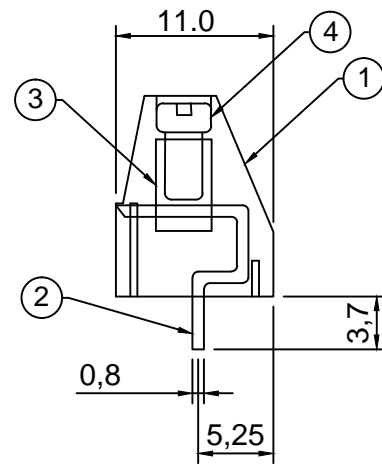


Current rating	AC250V 6Amp
Insulation resistance	500M Ohms of More at DC500V
Withstand voltage	AC1000V/Minute
Wire range	AWG #18~#26
Torque	4.0lb-in

5				
4	Screw	Steel	Ni	M2.6
3	Terminal-2	Brass	Tin	
2	Terminal-1	Brass	Tin	
1	Base	PA66		UL94V0
	Part Name	Material	Plating	Remark

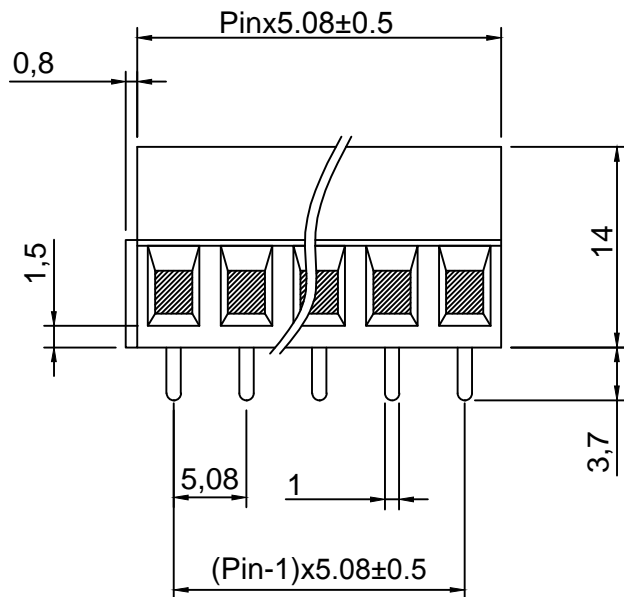

PCB hole Dia: $\phi 1.3$

<연결해서 여러핀수 사용시에는 Hole을 크게해야 됨>

(2P,3P,4P,5P Assemble)

GENERAL TOLERANCES			Part Name.		MOEDL No.	
0 ~ 10	± 0.2		Terminal Block		BI-508GS-*P	
11 ~ 50	± 0.5					
51 ~ 100	± 0.8		SIZE	Drawing BY.	Approval BY.	Sheet No.
Scale	/	A4				
Material		UNIT			(주)부일일렉트로닉스 BUIL ELECTRONICS CO.,LTD www.ebuild.com	
Finish		mm				