
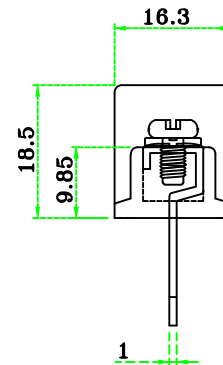
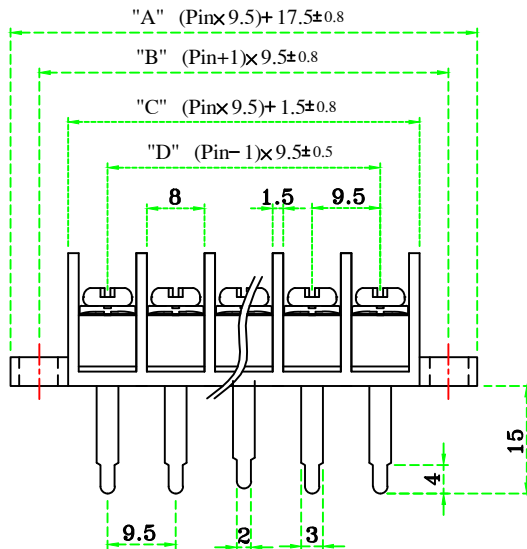



	1		2		3	4
4					Current rating	AC250V 20Amp
3	Screw	Steel	Ni	M3.5	Insulation resistance	1000M Ohms of More at DC500V
2	Terminal	Brass	TIN	1/2H	Withstand voltage	AC2000V/Minute
1	Base	PBT		UL94 V0	Wire range	AWG #14~22
A	Part Name	Material	Plating	Remark	Torque	6.9 lb-in

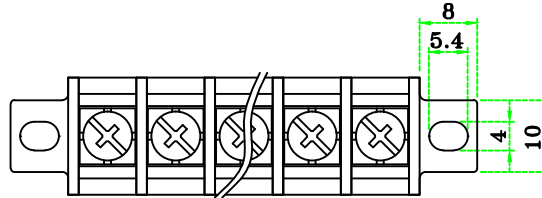

PCB hole Dia: $\phi 2.5$

Option.

1. Cover사용시 모델No. : BI-95A-1SDC-*P

2. Hole Pin(): 주문생산

Note.

1. 지시하지 않은 공차: **GENERAL TOLERANCES**

GENERAL TOLERANCES		Part Name. Terminal block	Dwg No. BI-95A-1SD-*P	
0 ~ 50	±0.5		Drawing BY.	Checkd BY.
50 ~ 100	±0.8	Sheet No.		
100 ~ 150	±1.0		(주)부일일렉트로닉스 BUIL ELECTRONICS CO., LTD. www.ebuil.com	
150 ~ 200	±1.2			
Scale	/			
Material				
Finish				