



4				
3	Screw	Steel	Ni	M3
2	Terminal	Brass	TIN	1/2H
1	Base	ABS		
A	Part Name	Material	Plating	Remark

Current rating	AC250V 10Amp
Insulation resistance	500M Ohms of More at DC500V
Withstand voltage	AC2000V/Minute
Wire range	AWG #18~26
Torque	6.9 lb-in




공간은 8mm인데, 와샤는 7mm라서
와샤가 약간 들어짐.
U 또는 링단자 사용요망.

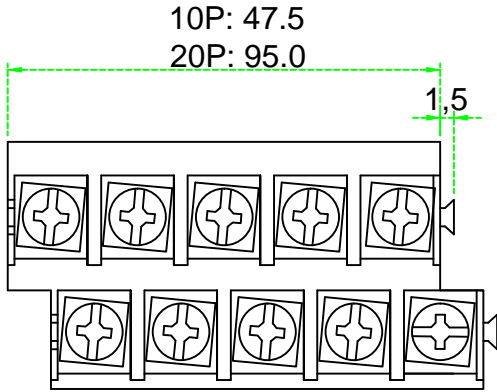

(10P, 20P_)

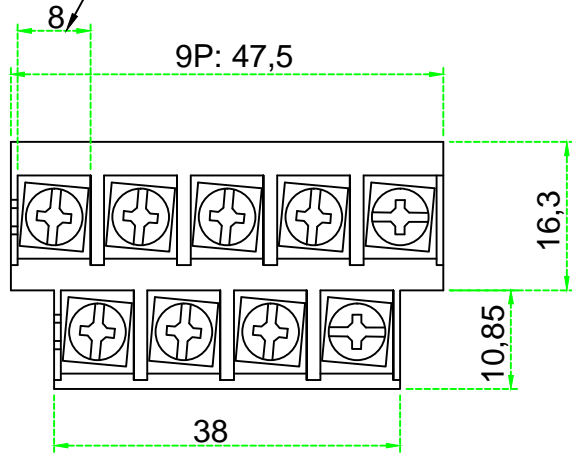

(9P_)

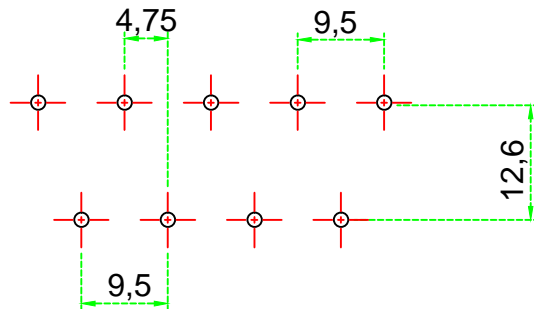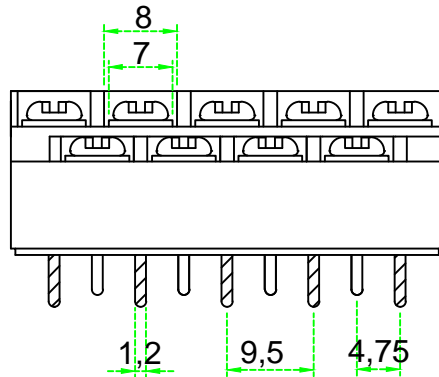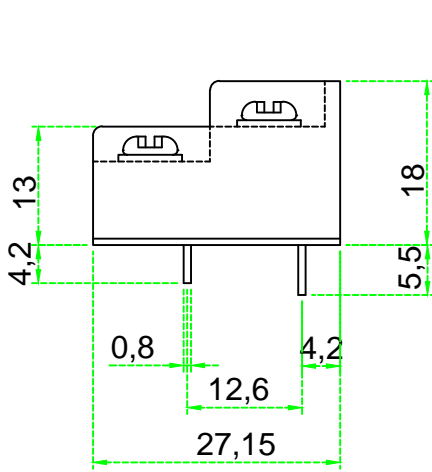

Note.

- 1.
2. 지시하지 않은 공차: **GENERAL TOLERANCES**
- 3.

GENERAL TOLERANCES		Part Name.		Dwg No.	
0 ~ 50	±0.3	Terminal block		BI-95DUAL-*P	
50 ~ 100	±0.5				
100 ~ 150	±0.8	Drawing BY.	Checkd BY.	Approval BY.	Sheet No.
150 ~ 200	±1.0				of
Scale	/	(주)부일일렉트로닉스 BUIL ELECTRONICS CO., LTD. www.ebuil.com			
Material					
Finish					