
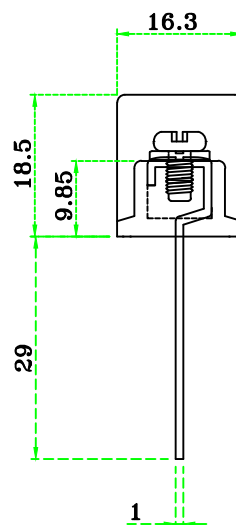
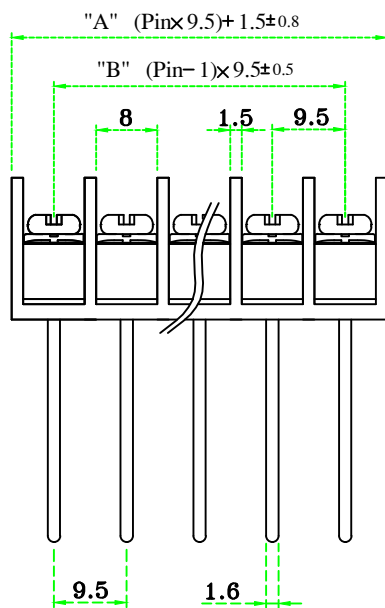


	1		2		3		4	
4					Current rating	AC250V 10Amp		
3	Screw	Steel	Ni	M3.5	Insulation resistance	1000M Ohms of More at DC500V		
2	Terminal	Brass	TIN	1/2H	Withstand voltage	AC2000V/Minute		
1	Base	PBT		UL94 V0	Wire range	AWG #14~22		
A	Part Name	Material	Plating	Remark	Torque	6.9 lb-in		

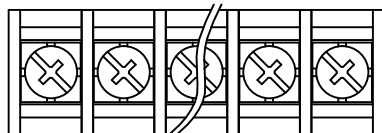

PCB hole Dia:  $\phi 2.0$

(Option)

1. Cover 사용시 No: BI-95A-2SC- \*P

(Note)

2. 지시하지 않은 공차: GENERAL TOLERANCES

GENERAL TOLERANCES			Part Name.		Dwg No.		
0 ~ 50	±0.5		Terminal block		BI-95A-2S- * P		
50 ~ 100	±0.8		Drawing BY.		Checkd BY.	Approval BY.	Sheet No.
100 ~ 150	±1.0						of
150 ~ 200	±1.2						
Scale			/		(주)부일일렉트로닉스 BUIL ELECTRONICS CO., LTD. www.ebuil.com		
Materral							
Finish							