
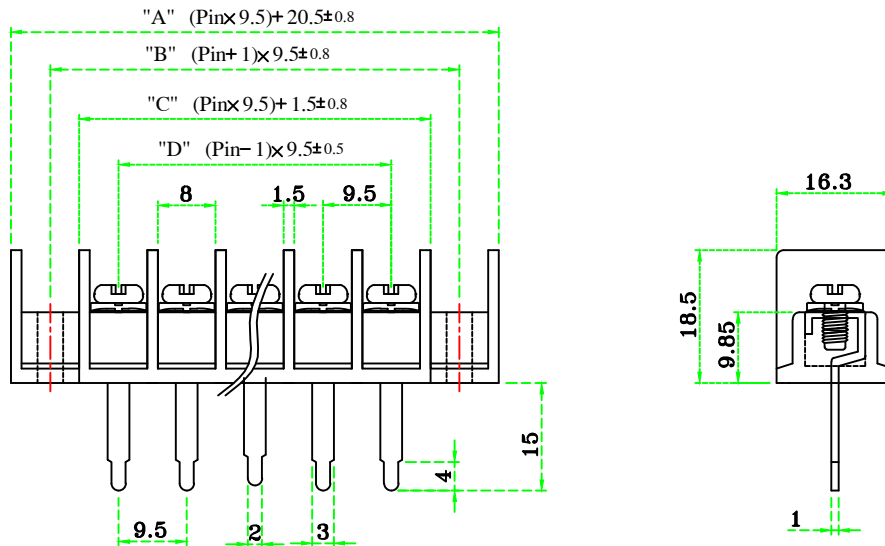



	1	2			3		4
4					Current rating	AC250V 20Amp	
3	Screw	Steel	Ni	M3.5	Insulation resistance	1000M Ohms of More at DC500V	
2	Terminal	Brass	TIN	1/2H	Withstand voltage	AC2000V/Minute	
1	Base	PBT		UL94 V0	Wire range	AWG #14~22	
A	Part Name	Material	Plating	Remark	Torque	6.9 lb-in	

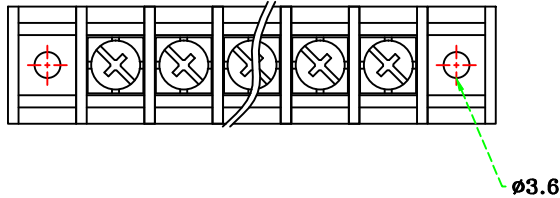

PCB hole Dia: $\phi 2.5$

Option.

1. Cover사용시 모델No. : BI-95A-1SFC-*P

2. Hole Pin(): 주문생산

Note.

1. 지시하지 않은 공차: GENERAL TOLERANCES

GENERAL TOLERANCES			Part Name.		Dwg No.		
0 ~ 50	±0.5	±1.5°	Terminal block		BI-95A-1SF-*P		
50 ~ 100	±0.8						
100 ~ 150	±1.0		Drawing BY.	Checkd BY.	Approval BY.	Sheet No.	of
150 ~ 200	±1.2					(주)부일일렉트로닉스 BUIL ELECTRONICS CO., LTD. www.ebuil.com	
Scale							
Material							
Finish							