
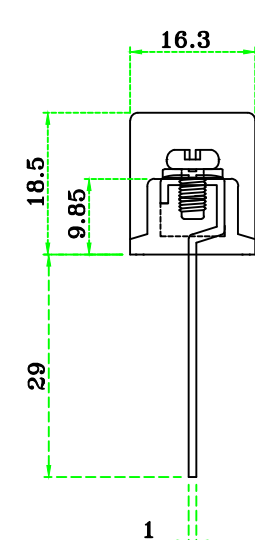
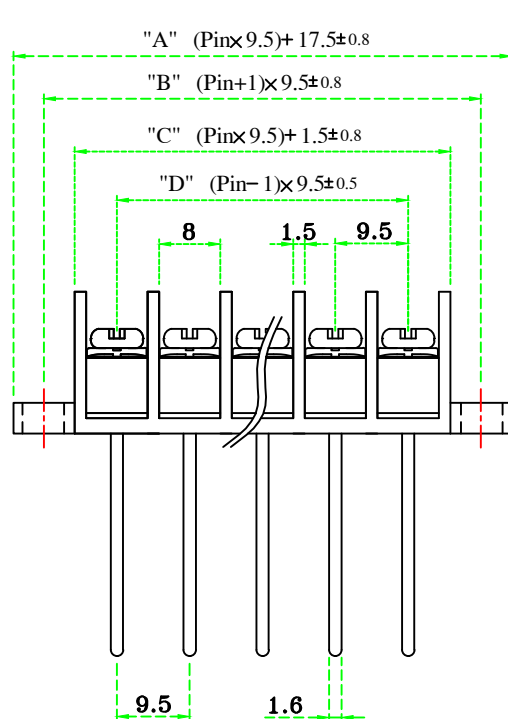


4					Current rating	AC250V 10Amp
3	Screw	Steel	Ni	M3.5	Insulation resistance	1000M Ohms of More at DC500V
2	Terminal	Brass	TIN	1/2H	Withstand voltage	AC2000V/Minute
1	Base	PBT		UL94 V0	Wire range	AWG #14~22
A	Part Name	Material	Plating	Remark	Torque	6.9 lb-in

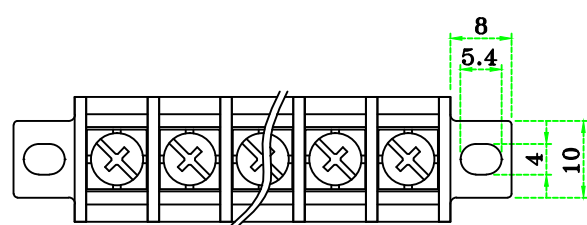

PCB hole Dia:  $\phi 2.0$

(Option)  
1. Cover 사용시 No: BI-95A-2SDC- \*P

(Note)  
2. 지시하지 않은 공차: **GENERAL TOLERANCES**

GENERAL TOLERANCES			Part Name.		Dwg No.		
0 ~ 50	$\pm 0.5$		Terminal block		BI-95A-2SD- * P		
50 ~ 100	$\pm 0.8$		Drawing BY.		Checkd BY.		
100 ~ 150	$\pm 1.0$		Approval BY.		Sheet No.		
150 ~ 200	$\pm 1.2$		of				
Scale	/					(주)부일일렉트로닉스 BUIL ELECTRONICS CO., LTD. www.ebuil.com	
Material							
Finish							