

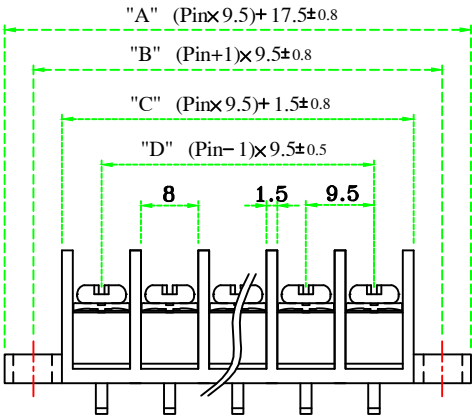






1					2					3					4				
4						Current rating					AC250V 10Amp								
3	Screw	Steel	Ni	M3.5		Insulation resistance					1000M Ohms of More at DC500V								
2	Terminal	Brass	TIN	1/2H		Withstand voltage					AC2000V/Minute								
1	Base	PBT		UL94 V0		Wire range					AWG #14~22								
	Part Name	Material	Plating	Remark		Torque					6.9 lb-in								



(A Type)
<Standard>

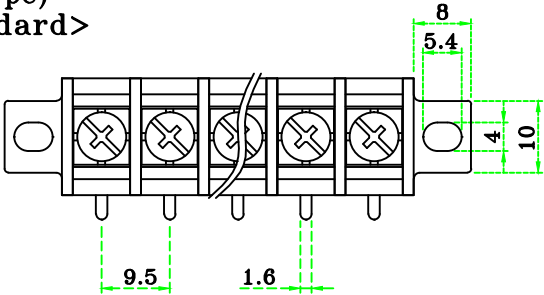

(B Type)

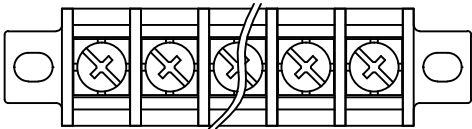

Option.

1. Cover사용시 모델No. : BI-95A-1LDC(0.8t)-*P

Note.

1. 지시하지 않은 공차: GENERAL TOLERANCES

PCB hole Dia: Ø2.0

GENERAL TOLERANCES				Part Name. Terminal block		Dwg No. BI-95A-1LD(0.8t)-* P			
0 ~ 50	±0.5		Drawing BY.			Checkd BY.	Approval BY.	Sheet No.	of
50 ~ 100	±0.8							(주)부일일렉트로닉스 BUIL ELECTRONICS CO., LTD. www.ebuild.com	
100 ~ 150	±1.0								
150 ~ 200	±1.2								
Scale		/							
Materral									
Finish									
1		2		3		4			