
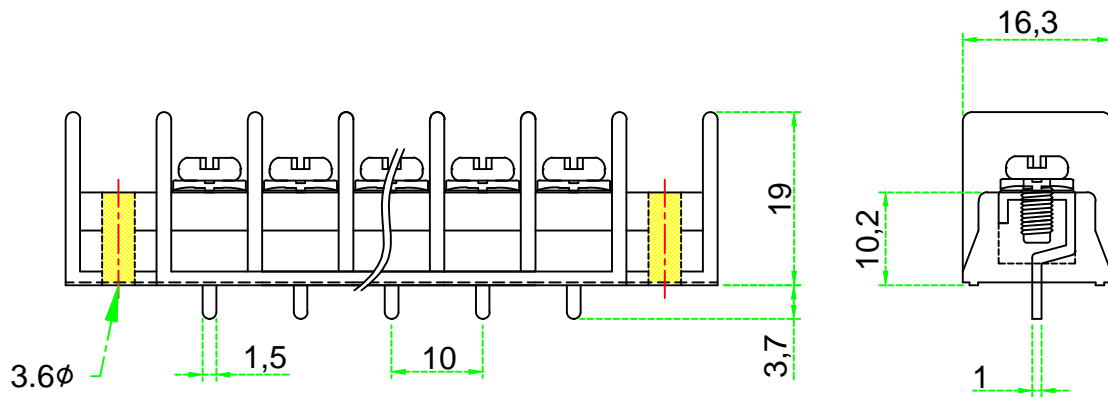


4					Current rating	AC250V 18Amp
3	Screw	Steel	Ni	M3.5	Insulation resistance	1000M Ohms of More at DC500V
2	Terminal	Brass	TIN	1/2H	Withstand voltage	AC2000V/Minute
1	Base	PBT		UL94V0	Wire range	AWG #12~22
A	Part Name	Material	Plating	Remark	Torque	6.9 lb-in

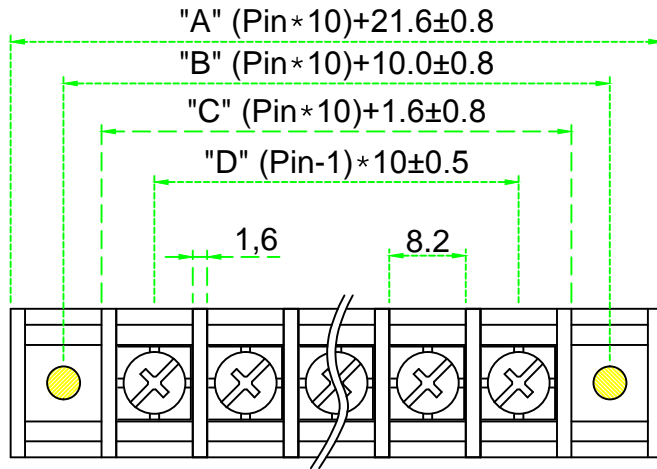

PCB hole Dia: $\phi 2.0$

Note.

1. One Mold 최대 핀수: 18Pin
2. Base 연결용 최대 핀수 : ∞
3. Cover 사용시 모델No. : BI-10A-AFC-*P_(Option)
4. 지시하지 않은 공차: GENERAL TOLERANCES

GENERAL TOLERANCES		Part Name.		Dwg No.	
0 ~ 50	±0.3	Terminal block		BI-10AF-*P	
50 ~ 100	±0.5				
100 ~ 150	±0.8				
150 ~ 200	±1.0				
Scale	/	Drawing BY.	Checkd BY.	Approval BY.	Sheet No. of
Material					(주)부일일렉트로닉스 BUIL ELECTRONICS CO., LTD. www.ebuil.com
Finish					
1		2		3	4