


1					2					3					4				
4						Current rating					AC250V 10Amp								
3	Screw	Steel	Ni	M3.5		Insulation resistance					1000M Ohms of More at DC500V								
2	Terminal	Brass	TIN	1/2H		Withstand voltage					AC2000V/Minute								
1	Base	PBT		UL94V0		Wire range					AWG #12~22								
	Part Name	Material	Plating	Remark		Torque					6.9 lb-in								

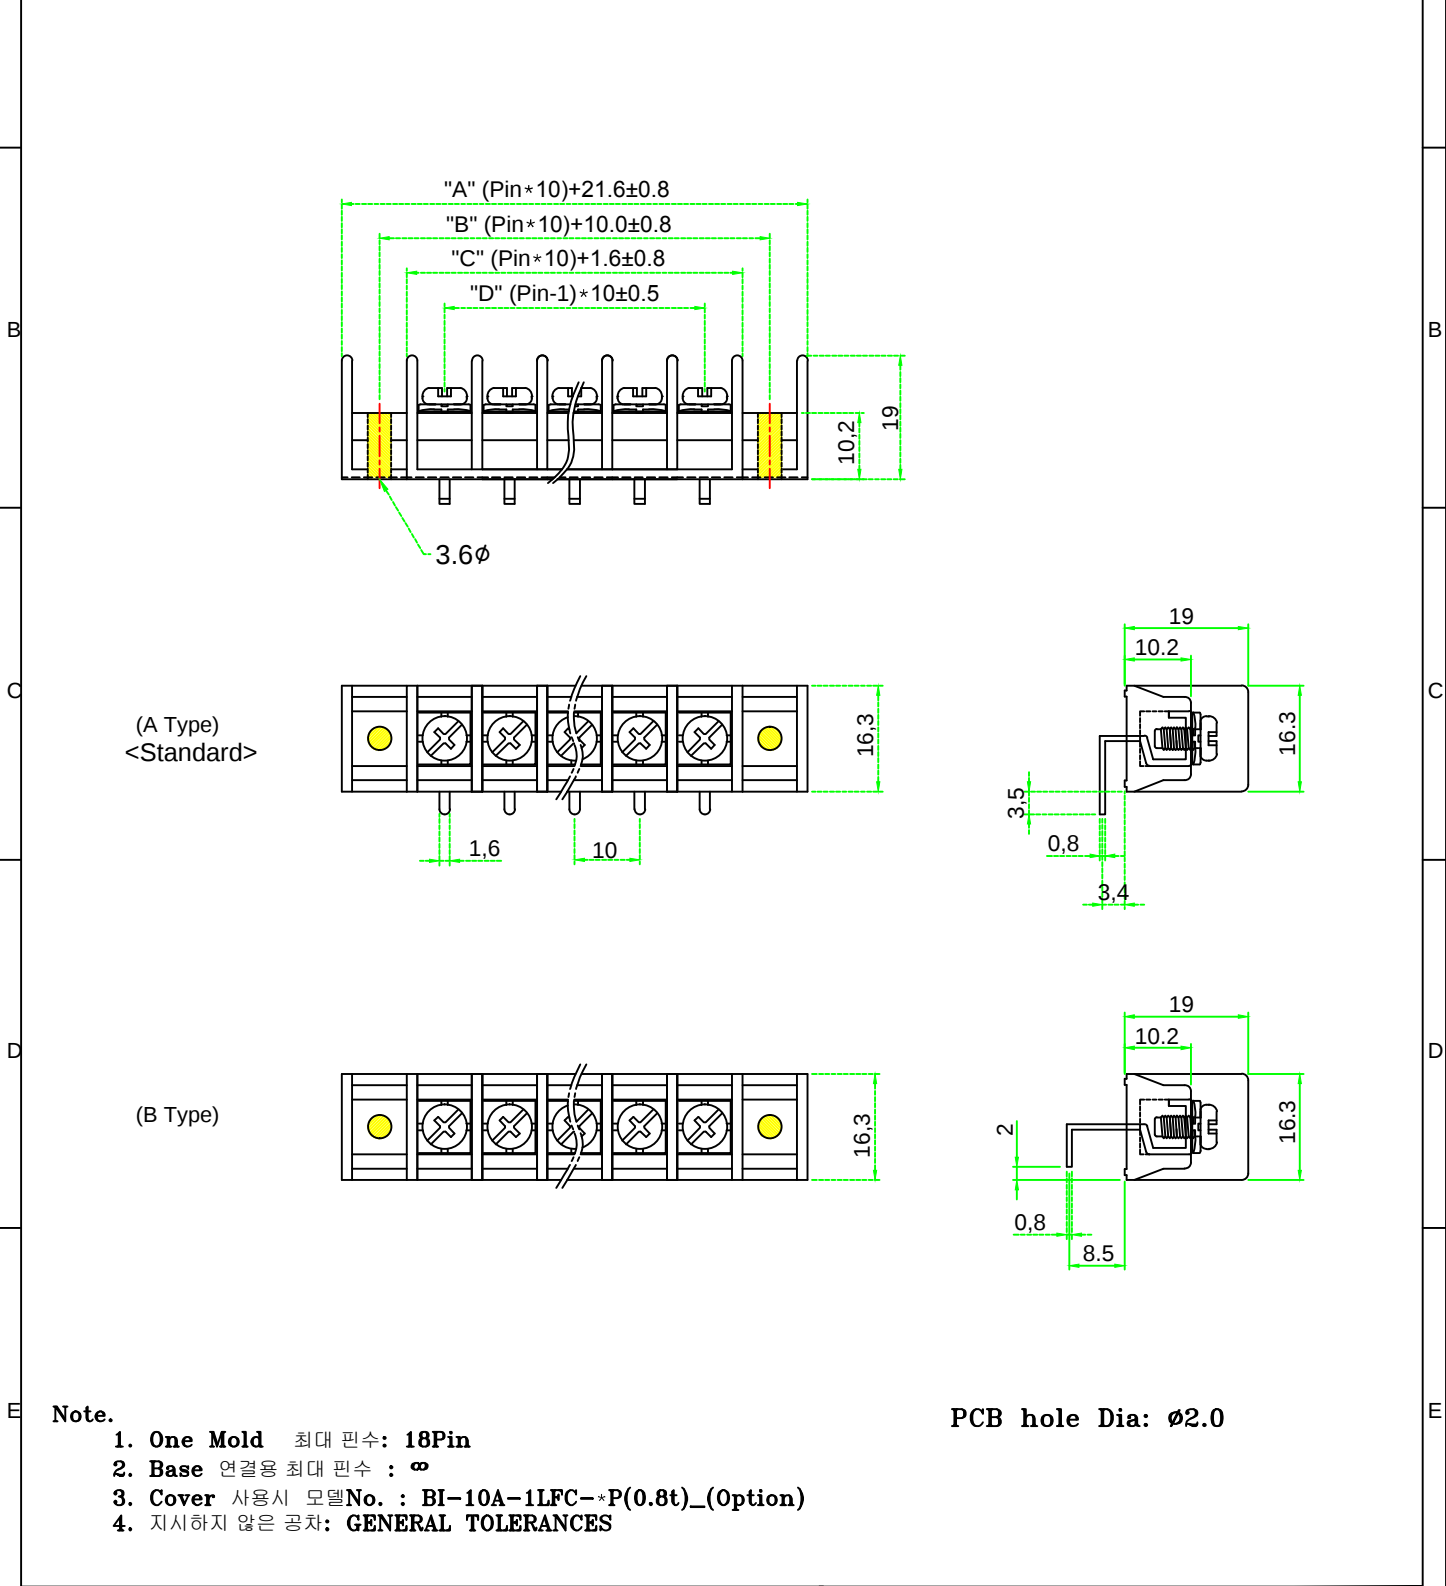

GENERAL TOLERANCES			Part Name.		Dwg No.	
0 ~ 50	±0.3		Terminal block		BI-10A-1LF-*P(0.8t)	
50 ~ 100	±0.5					
100 ~ 150	±0.8					
150 ~ 200	±1.0					
Scale	/		Drawing BY.	Checkd BY.	Approval BY.	Sheet No.
Materral						of
Finish						
1	2	3	(주)부일일렉트로닉스 BUIL ELECTRONICS CO., LTD. www.ebuil.com			
1	2	3				