

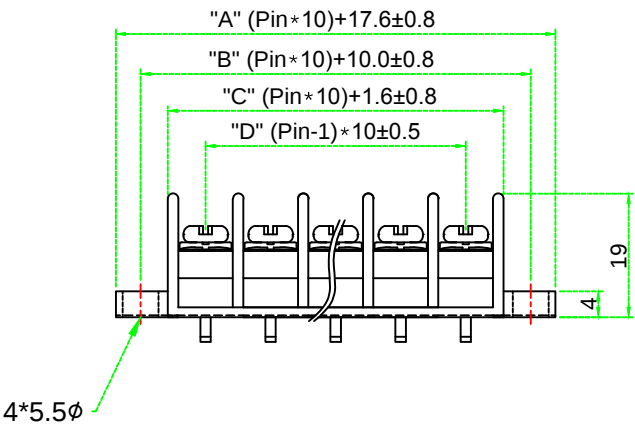




1		2			3		4
4					Current rating	AC250V 10Amp	
3	Screw	Steel	Ni	M3.5	Insulation resistance	1000M Ohms of More at DC500V	
2	Terminal	Brass	TIN	1/2H	Withstand voltage	AC2000V/Minute	
1	Base	PBT		UL94V0	Wire range	AWG #12~22	
A	Part Name	Material	Plating	Remark	Torque	6.9 lb-in	



(A Type)
<Standard>

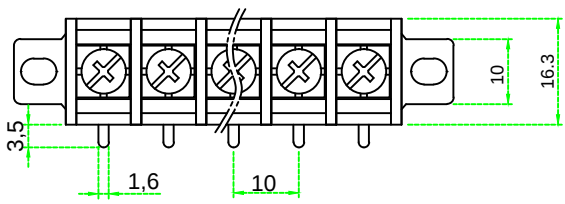

(B Type)

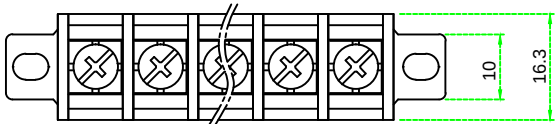

- Note.**
- 1. **One Mold** 최대 핀수: 18Pin
 - 2. **Cover** 사용시 모델No. : BI-10A-1LDC-*P(0.8t)_(Option)
 - 3. 지시하지 않은 공차: **GENERAL TOLERANCES**

PCB hole Dia: Ø2.0

GENERAL TOLERANCES			Part Name.		Dwg No.		
0 ~ 50	±0.3		Terminal block		BI-10A-1LD-*P(0.8t)		
50 ~ 100	±0.5						
100 ~ 150	±0.8						
150 ~ 200	±1.0						
Scale		/	Drawing BY.	Checkd BY.	Approval BY.	Sheet No.	of
Materral						(주)부일일렉트로닉스 BUIL ELECTRONICS CO., LTD. www.ebuil.com	
Finish							