

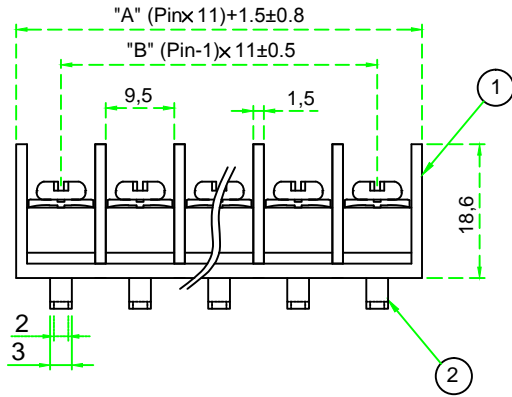



4				
3	Screw	Steel	Ni	M3.5
2	Terminal	Brass	TIN	1/2H
1	Base	PBT		UL94 V-0
A	Part Name	Material	Plating	Remark




Current rating	AC250V 20Amp
Insulation resistance	1000M Ohms of More at DC500V
Withstand voltage	AC2000V/Minute
Wire range	AWG #14~#22
Torque	6.9 lb-in



(A Type)
<Standard>

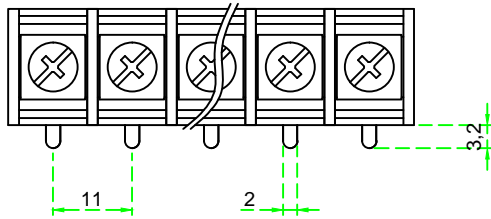

(B Type)

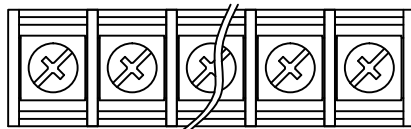

Option.

1. Cover 사용시 모델No. : BI-11A-1LC-*P

2. Hole Pin(): 주문생산

PCB hole Dia: $\phi 2.5$

Note.

1. 지시하지 않은 공차: **GENERAL TOLERANCES**

GENERAL TOLERANCES		Part Name.		Dwg No.	
0 ~ 50	± 0.5	Terminal block		BI-11A-1L-*P	
50 ~ 100	± 0.8				
100 ~ 150	± 1.0	Drawing BY.	Checkd BY.	Approval BY.	Sheet No.
150 ~ 200	± 1.2				of
Scale	/	(주)부일일렉트로닉스 BUIL ELECTRONICS CO., LTD. www.ebuil.com			
Material					
Finish					