


1				3		4
4				Current rating	AC250V 10Amp	
3	Screw	Steel	Ni	Insulation resistance	1000M Ohms of More at DC500V	
2	Terminal	Brass	TIN	Withstand voltage	AC2000V/Minute	
1	Base	PBT		Wire range	AWG #14~#22	
A	Part Name	Material	Plating	Torque	6.9 lb-in	
			Remark			

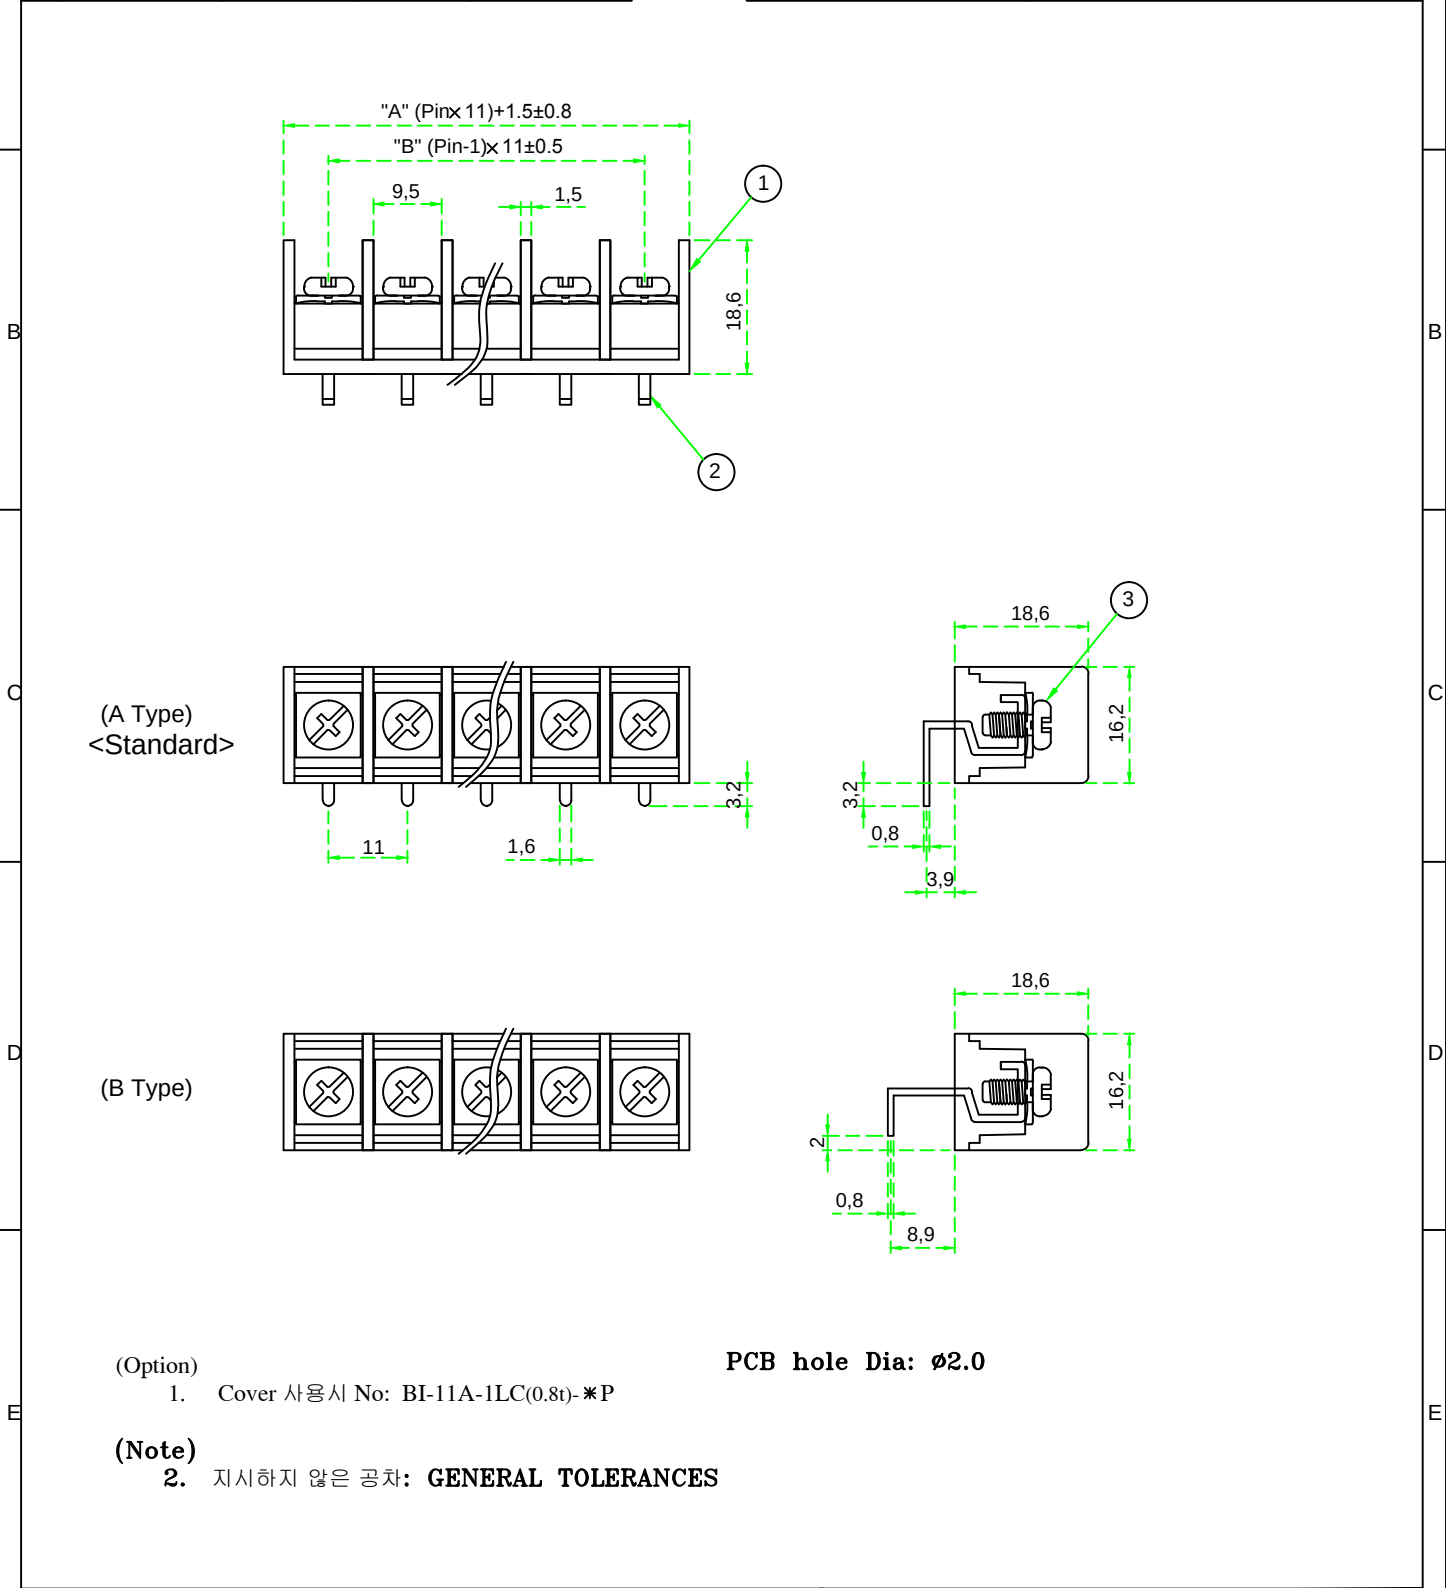

GENERAL TOLERANCES				Part Name. Terminal block		Dwg No. BI-11A-1L(0.8t)-* P	
0 ~ 50	±0.5						
50 ~ 100	±0.8						
100 ~ 150	±1.0						
150 ~ 200	±1.2						
Scale	/	Drawing BY.	Checkd BY.	Approval BY.	Sheet No.	of	
Materral					(주)부일일렉트로닉스 BUIL ELECTRONICS CO., LTD. www.ebuil.com		
Finish							
1		2		3		4	