
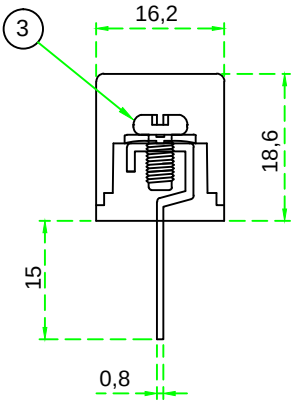
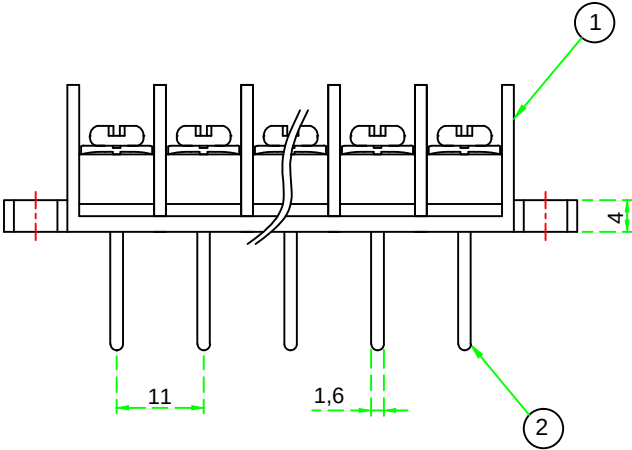


1				2		3		4
4						Current rating	AC250V 10Amp	
3	Screw	Steel	Ni	M3.5		Insulation resistance	1000M Ohms of More at DC500V	
2	Terminal	Brass	TIN	1/2H		Withstand voltage	AC2000V/Minute	
1	Base	PBT		UL94 V-0		Wire range	AWG #14~#22	
A	Part Name	Material	Plating	Remark		Torque	6.9 lb-in	

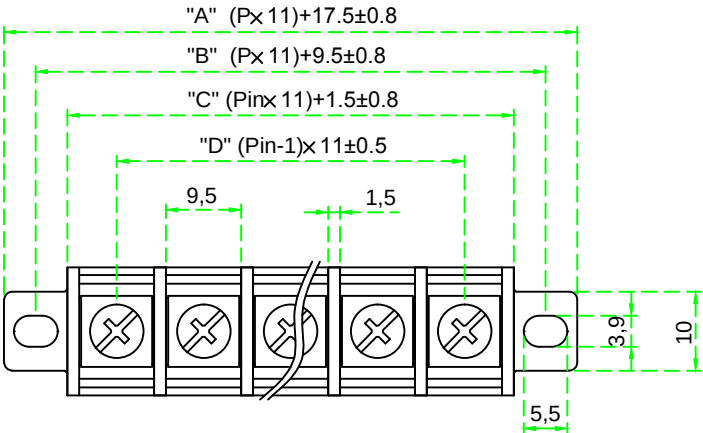

PCB hole Dia: ø2.0

- (Option)
- Cover 사용시 No: BI-11A-1SDC(0.8t)-*P
- (Note)
- 지시하지 않은 공차: **GENERAL TOLERANCES**

GENERAL TOLERANCES				Part Name. Terminal block		Dwg No. BI-11A-1SD(0.8t)-* P		
0 ~ 50	±0.5							
50 ~ 100	±0.8							
100 ~ 150	±1.0							
150 ~ 200	±1.2							
Scale		/		Drawing BY.	Checkd BY.	Approval BY.	Sheet No.	of
Materral							(주)부일일렉트로닉스 BUIL ELECTRONICS CO., LTD. www.ebuil.com	
Finish								
1		2		3		4		