
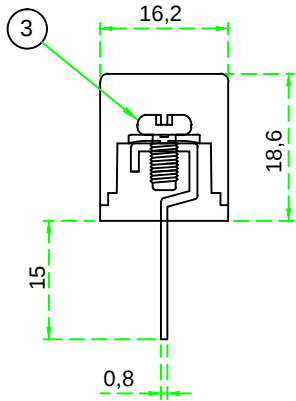
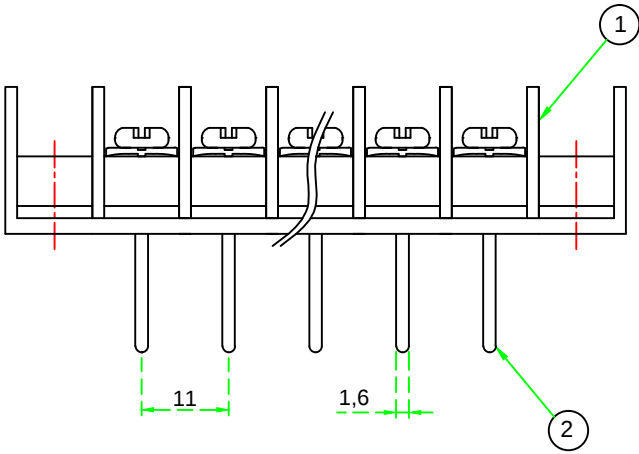


1				2		3		4
4						Current rating	AC250V 10Amp	
3	Screw	Steel	Ni	M3.5		Insulation resistance	1000M Ohms of More at DC500V	
2	Terminal	Brass	TIN	1/2H		Withstand voltage	AC2000V/Minute	
1	Base	PBT		UL94 V-0		Wire range	AWG #14~#22	
A	Part Name	Material	Plating	Remark		Torque	6.9 lb-in	

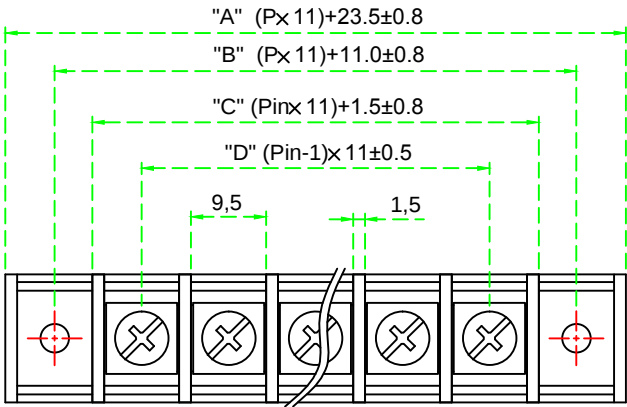

PCB hole Dia: ø2.0

(Option)

1. Cover 사용시 No: BI-11A-1SFC(0.8t)-*P

(Note)

2. 지시하지 않은 공차: **GENERAL TOLERANCES**

GENERAL TOLERANCES				Part Name. Terminal block		Dwg No. BI-11A-1SF(0.8t)-※ P			
0 ~ 50	±0.5								
50 ~ 100	±0.8								
100 ~ 150	±1.0								
150 ~ 200	±1.2								
Scale		/		Drawing BY.	Checkd BY.	Approval BY.	Sheet No.	of	
Materral							(주)부일일렉트로닉스 BUIL ELECTRONICS CO., LTD. www.ebuil.com		
Finish									
1				2		3		4	