



5	Screw	Steel	Ni	M2.6
4	Wafer Terminal	Brass	TIN	1/2H
3	Contact Terminal	Brass	TIN	EH
2	Cage Terminal	Brass	TIN	H
1	Base	PA-66		UL94V0
	Part Name	Material	Plating	Remark

Current rating	AC250V 6Amp
Insulation resistance	500M Ohms of More at DC500V
Withstand voltage	AC2000V/Minute
Wire range	AWG #18~26
Torque	4.0 lb-in




(BI-508PIB-\*\*P)





▶4, 5, 7, 8, 9p  
= 커팅면  
▶2, 3, 6, 10p  
= One Mold


(BI-508PIWL-\*\*P)

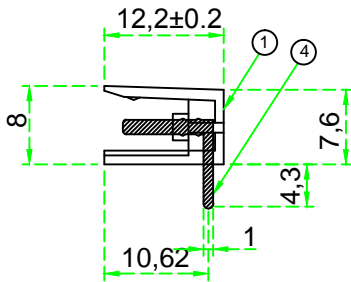

(BI-508PIWS-\*\*P)

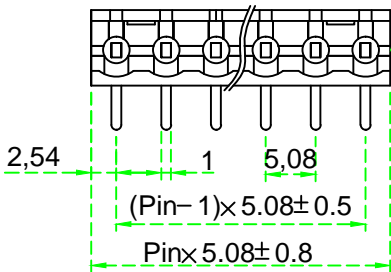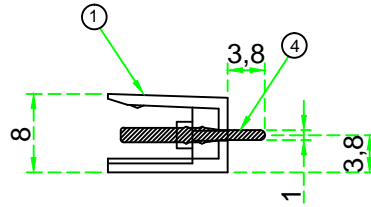


▶4, 5, 7, 8, 9p  
= 커팅면  
▶2, 3, 6, 10p  
= One Mold

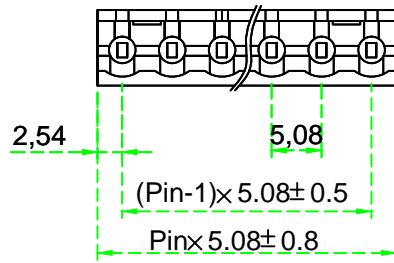


▶4, 5, 7, 8, 9p  
= 커팅면  
▶2, 3, 6, 10p  
= One Mold

PCB hole Dia:  $\phi 1.4 \sim 1.6$



(BI-508PIB & BI-508PIWL ASS'Y)



(BI-508PIB & BI-508PIWS ASS'Y)

NOTE.

1. 지시하지 않은 공차 : General Tolerances

GENERAL TOLERANCES		Part Name.		Dwg No.	
0 ~ 10	±0.3	<b>Terminal block</b>		<b>BI-508PIB-**P</b> <b>BI-508PIWL-**P</b> <b>BI-508PIWS-**P</b>	
10 ~ 50	±0.5				
50 ~ 100	±0.8	Drawing BY.		Sheet No.	
 ±1.5°		Check BY.		of	
		Approval BY.		(주)부일일렉트로닉스 BUIL ELECTRONICS CO., LTD. www.ebuil.com	
Scale	/				
Material					
Finish					