


Current rating	AC250V 20Amp
Insulation resistance	1000M Ohms of More at DC500V
Withstand voltage	AC2000V/Minute
Wire range	AWG #12~#24
Torque	5.0 lb-in

5				
4	Screw	Steel	Ni	M3
3	Wire protector	Stainless Steel		304
2	Terminal	Brass	Ni	1/2H
1	Housing	Nylon-66		UL94V0
	Part Name	Material	Plating	Remark

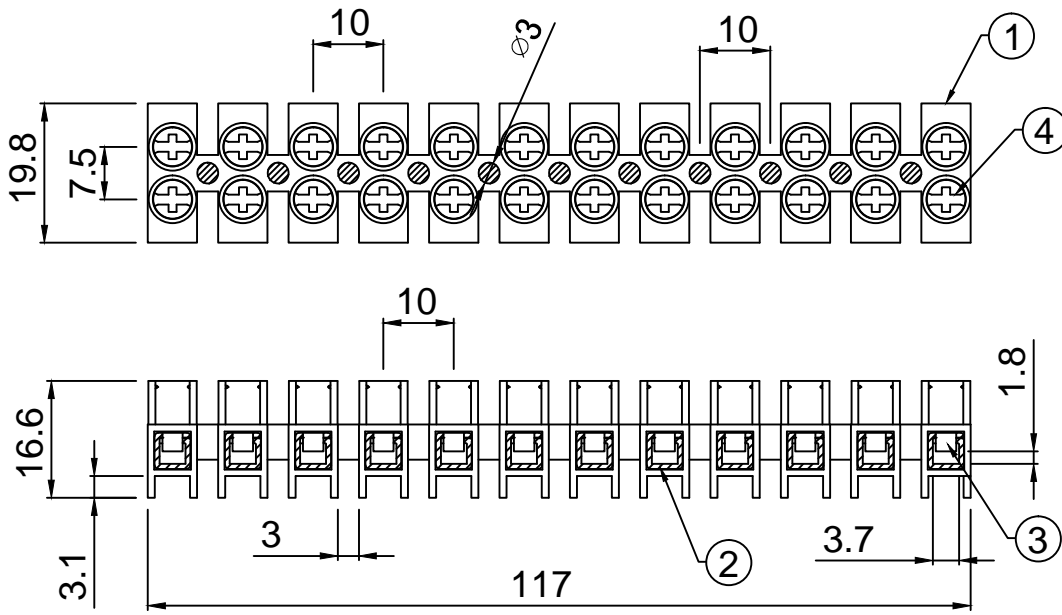

GENERAL TOLERANCES			Part Name.		MOEDL No.	
0 ~ 10	±0.3	±1.5°	Terminal Block		BI-12P20A	
11 ~ 50	±0.5					
51 ~ 100	±0.8					
Scale	/	SIZE	Drawing BY.	Approval BY.	Sheet No.	(주)부일일렉트로닉스 BUIL ELECTRONICS CO.,LTD www.ebuil.com
Material		A4				
Finish		UNIT				
		mm				