




(하우징과 단자가 분리된 상태로 납품됨)


(2P) 3p or 5p를 커팅한 제품




(2P) ONE Mold
= 생산일시중단




(3P) 5p를 커팅한 제품





(3P) ONE Mold




(4P) 5p를 커팅한 제품

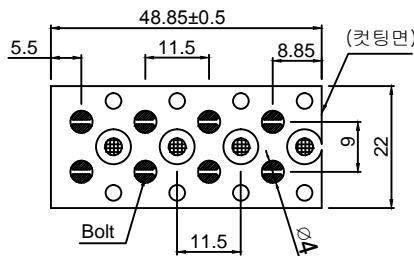

(5P) ONE Mold

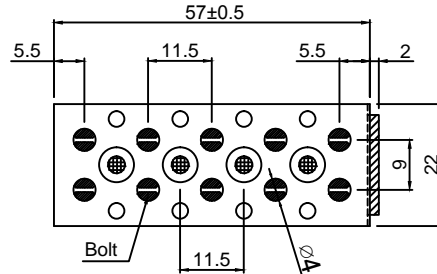

(Cable 방향 표시도)

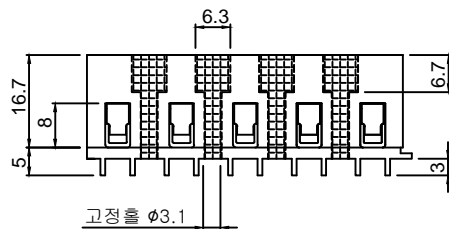

(측면)

GENERAL TOLERANCES		
0 ~ 10	±0.3	±1.5°
10 ~ 20	±0.5	
20 ~ 50	±0.8	
50 ~ 100	±1.0	
Scale	/	
Material		
Finish		

Part Name.		Dwg No.	
Terminal Block		BI-NYL20A-*P	
Drawing BY.	Checkd BY.	Approval BY.	Sheet No. of
			(주)부일일렉트로닉스 BUIL ELECTRONICS CO., LTD. www.ebuil.com

Part Name.		Dwg No.	
Terminal Block		BI-NYL20A-*P	
Drawing BY.	Checkd BY.	Approval BY.	Sheet No. of
			(주)부일일렉트로닉스 BUIL ELECTRONICS CO., LTD. www.ebuil.com