
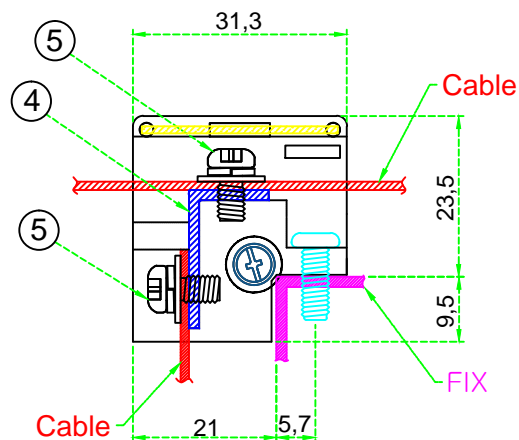
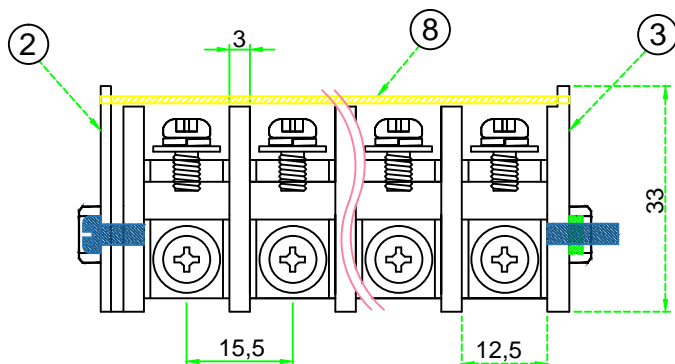


Current rating	AC250V 60Amp
Insulation resistance	1000M Ohms of More at DC500V
Withstand voltage	AC2000V/Minute
Wire range	AWG #10~14

8	Cover	PC		1t
7	Nut	Steel	Zn	M3
6	Screw-2	Steel	Zn	M3*55
5	Screw-1	Steel	Ni	M4*8 Sem's
4	Terminal	BRASS	Ni	1.5t
3	Base	PBT	BLACK	UL94V-0
2	Base	PBT	BLACK	UL94V-0
1	Base	PBT	BLACK	UL94V-0
	Part Name	Material	Plating	Remark

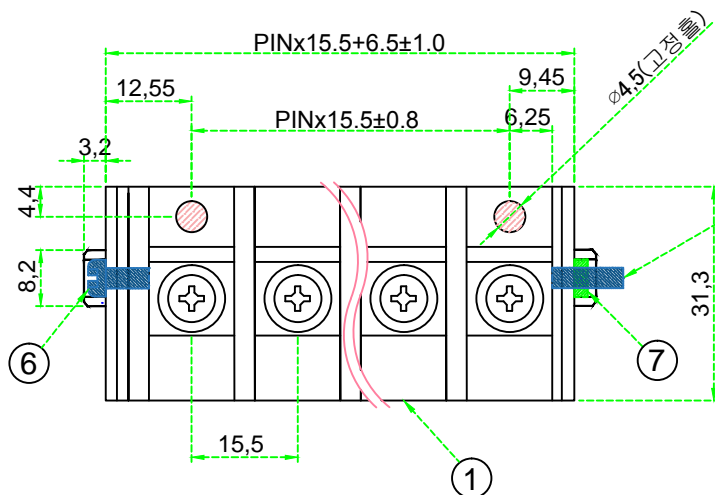

NOTE.

1. 5 Pin 이상은 별도 문의

GENERAL TOLERANCES		Part Name.		Dwg No.	
0 ~ 20	±0.5	Terminal Block		BI-TRT40A-*P	
20 ~ 50	±0.8				
50 ~ 70	±1.0	Drawing BY.	Checkd BY.	Approval BY.	Sheet No.
70 ~ 100	±1.3				of
Scale	/	(주)부일일렉트로닉스 BUIL ELECTRONICS CO., LTD. www.ebuild.com			
Material					
Finish					