
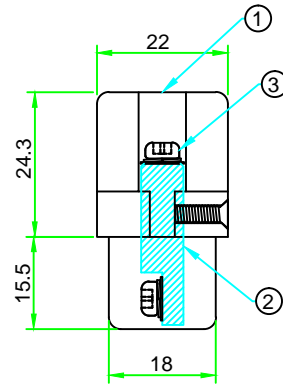
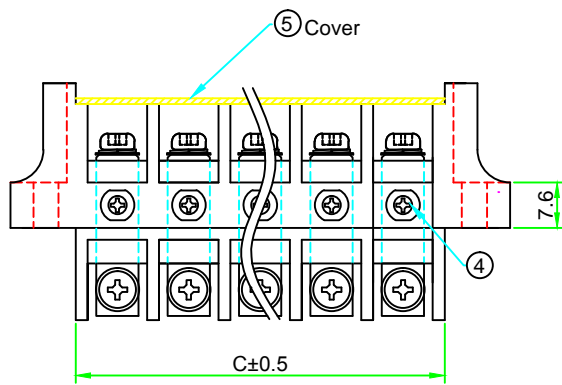


5	Cover	PC_투명		1t	Current rating	AC380V 30Amp
4	Screw-2	Steel	3가아연(Black)	M3	Insulation resistance	500M Ohms of More at DC500V
3	Screw-1	Steel	Ni	M4	Withstand voltage	AC2000V/Minute
2	Terminal	쾌삭황동(C3604)	Ni	Ø7	Wire range	AWG #8~16
1	Base	PBT		UL94V-0		
	Part Name	Material	Plating	Remark		

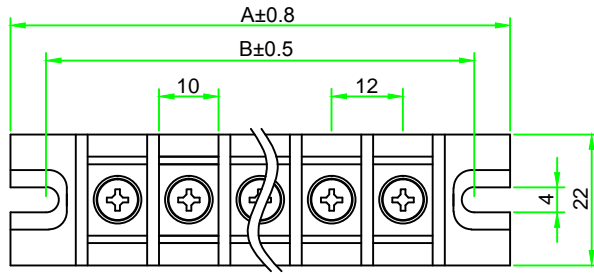

Note.

1. Base & Screw & Cover 분리된 상태로 출고
2. 지시하지 않은 공차: GENERAL TOLERANCES

Pin	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
A	48	60	72	84	96	108	120	132	144	156	168	180	192	204	216	228	240	252	264
B	36	48	60	72	84	96	108	120	132	144	156	168	180	192	204	216	228	240	252
C	26	38	50	62	74	86	98	110	124	134	146	158	170	182	194	206	218	230	242

GENERAL TOLERANCES			Part Name.			Dwg No.		
0 ~ 50	±0.5	±1.5°	Terminal block			BI-12PTHC - **P		
50 ~ 100	±0.8							
100 ~ 150	±1.0		Drawing BY.	Checkd BY.	Approval BY.	Sheet No.	of	
150 ~ 200	±1.2					(주)부일일렉트로닉스 BUIL ELECTRONICS CO., LTD. www.ebuil.com		
Scale	/							
Material								
Finish								